



TPR-01

Thermal receipt printer



Warehouse



Supermarket



Medical




Catering



POST

Feature

- » Support GB18030,Multiple international languages.
- » ESC/POS command compatibility.
- » Support QRcode and IAP online.
- » Support wall-mounted.

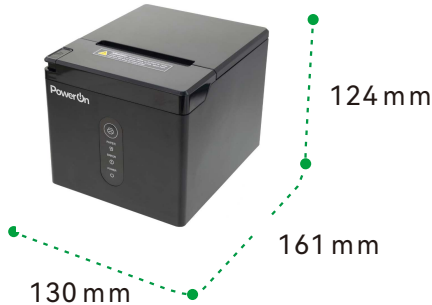

TPR-01

Thermal receipt printer



VARIOUS INTERFACE



EASY LOAD



COMPACT DESIGN



HIGH SPEED



Model	TPR-01	
Resolution	203 DPI	
Paper width	79.5±0.5mm	
Print width	72mm	
Column capacity	576 dots/line	
Printing speed	230 mm/s	
Interface	USB, USB + Network Port	
Line spacing	3.75mm(Adjustable by commands)	
Character size	ANK, Font A: 1.5×3.0mm(12×24 dots) Font B: 1.1×2.1mm(9×17 dots)	

Software parameters

Extension character sheet	PC347(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portugal) / PC863(Canadian) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / PC858 / IranII / Latvian / Arabic / PT151(1251)	
1D Barcode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128	
2D Barcode	QR CODE / PDF417	
Input buffer	96 Kbytes	256 Kbytes
NV Flash	256 Kbytes	

Power

Power adaptor	Input: AC 100~240V, 50 ~ 60Hz, 2.0A	
Printer Input	DC 24V/2.5A	
Cash drawer	DC 24V/1A	

Physical characteristics

Weight	0.84 Kg	
Dimensions	161 × 130 × 124mm(D*W*H)	

Environmental Requirements

Work environment	Temperature (0 ~ 45℃) humidity(10 ~ 80%)	
Storage environment	Temperature(-10 ~ 60℃) humidity(10 ~ 90%)	

Reliability

Auto cutter	Partial	
Cutter life	1.5 million cuts	
Printhead life	150 km	

Software

Emulation	ESC/POS	
Driver	Windows / Linux / Mac OS / Android	



Android



iOS



Windows



Linux

