


PowerOn

TPR-03

Thermal Receipt Printer

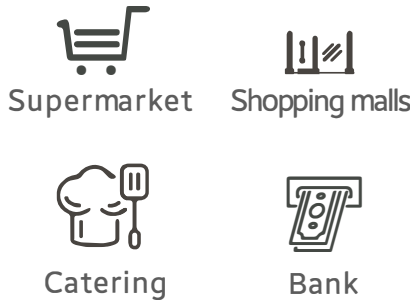

TPR-03

Thermal Receipt Printer



QR CODE



AUTO CUTTER



HIGH SPEED

PAPER WIDTH



Printing			
Printing method	Direct thermal		
Print width	58mm / 80mm		
Column capacity	576 dots/line		
Printing speed	300mm/s		
Interface	USB / LAN / USB+Serial		
Printing paper	58mm / 80mm		
Line spacing	3.75mm(Adjustable by commands)		
Print command	ESC/POS		
Column number	80mm paper: Font A - 42 columns or 48 columns/ Font B - 56 columns or 64 columns/		
Character size	ANK, Font A: 12×24 dots Font B: 9×17 dots		
Graphics	Monochrome BMP and other image files can be downloaded to FLASH		
Cutter			
Auto cutter	Partial		
Barcode Character			
Extension character sheet	PC437(Standard Europe)/Katakana/PC850(Multilingual)/PC860(Portuguese)/ PC863(Canadian-French)/PC865(Nordic)/West Europe/Greek/Hebrew/East Europe/ Iran/WPC1252/PC866(Cyrillic#2)/PC852(Latin2)/PC858/IranII/Latvian/Arabic/PT151(1251)		
1D code	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128		
2D code	QR CODE / PDF417		
Buffer			
Input buffer	96Kbytes(USB, USB+Serial); 256Kbytes(Lan, USB+Lan)	256Kbytes	4096Kbytes
NV Flash	256Kbytes		
Power			
Power adaptor	AC 100-240V/50~60Hz		
Power source	DC 24V/2.5A		
Cash drawer output	DC 24V/1A		
Physical characteristics			
Weight	0.92 KG		
Dimensions	180*140*127mm		
Environmental Requirements			
Work environment	Temperature (0~45℃) humidity(10~80%)(non-condensing)		
Storage environment	Temperature(-10~60℃) humidity(10~90%)		
Reliability			
Cutter life	1.5 million cuts		
Printer head life	150KM		
Driver	Windows / Linux		

